


TABLE "D" BLIND PLATE FLANGES

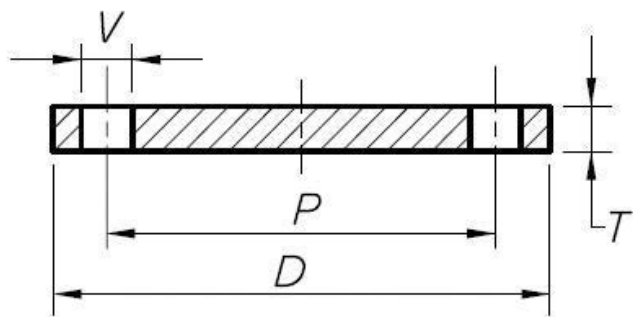

Nominal Pipe Size (mm)	GVF Code	OD of Flange D (mm)	Bolt Circle Diameter P (mm)	Bolt Hole Diameter V (mm)	Number of Bolt Holes	Thickness of Flange T (mm)	Weight Approx. (Kg)
100	ASBLD100	215	178	18	4	12	3.42
125	ASBLD125	255	210	18	8	13	5.14
150	ASBLD150	280	235	18	8	13	6.23
200	ASBLD200	335	292	18	8	13	9.01
250	ASBLD250	405	356	22	8	16	16.32
300	ASBLD300	455	406	22	12	19	23.99
350	ASBLD350	525	470	26	12	22	36.84
400	ASBLD400	580	521	26	12	22	45.2
450	ASBLD450	640	584	26	12	25	61.72
500	ASBLD500	705	641	26	16	29	87.93
600	ASBLD600	825	756	30	16	32	131.25

MATERIALS

Q235B / Rst37.2

Plate Steel

SPECIFICATIONS

Pressure Rating

700 kPa

STANDARD

Dimensional

AS2129

VALVES

GALVANISED
MALLEABLESTAINLESS
STEEL FITTINGSBLACK & GAL
STEEL FITTINGSHIGH PRESSURE
FITTINGS

CAMLOCKS

ROLL GROOVE

BUTTWELD

FLANGES