


# BRASS BALL VALVE SS LEVER M/F (DL)

## BRASS VALVES

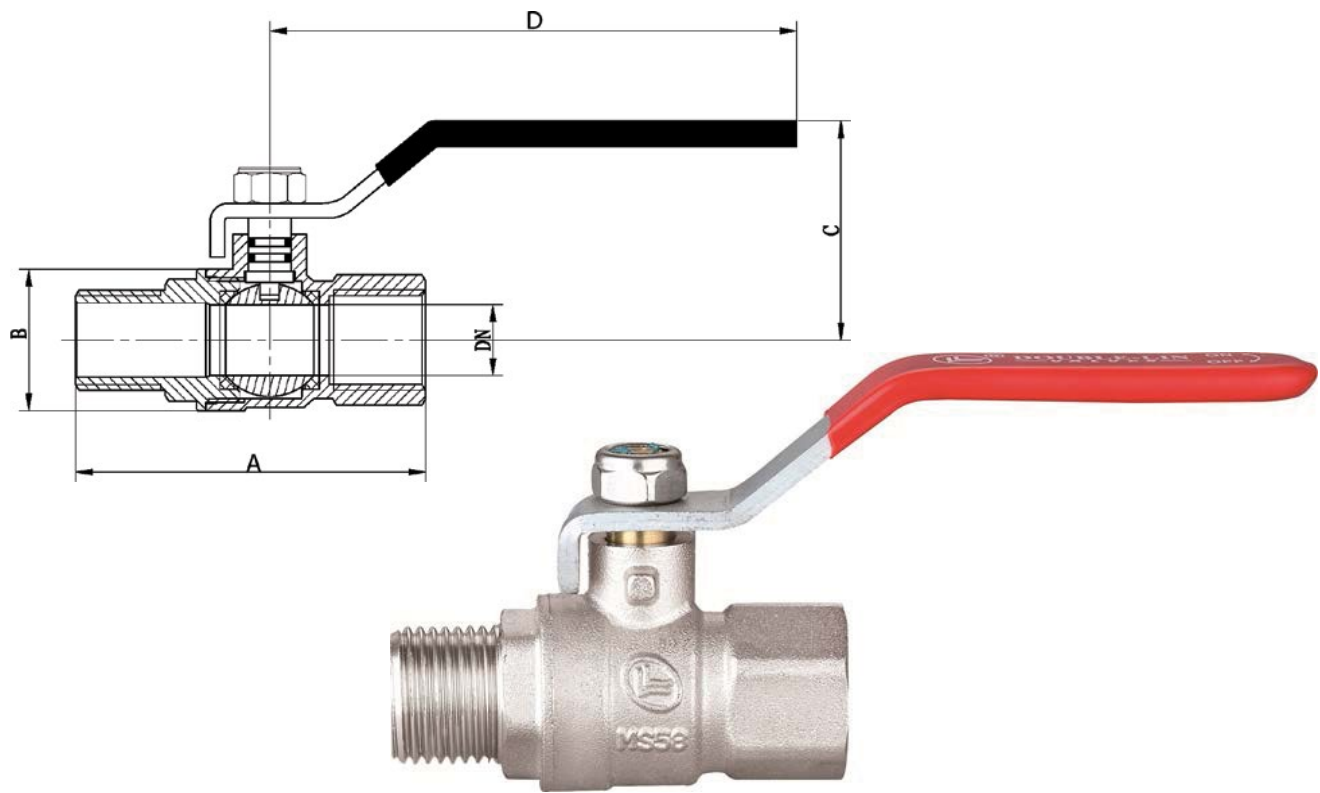

| GVF CODE  | DN SIZE (mm) | DN BORE (mm) | A (mm) | B (mm) | C (mm) | D (mm) | WEIGHT (kg) |
|-----------|--------------|--------------|--------|--------|--------|--------|-------------|
| BBVMFS008 | 8            | 9            | 54.8   | 23     | 39.2   | 87     | 0.13        |
| BBVMFS010 | 10           | 10           | 55.3   | 23     | 39.8   | 87     | 0.12        |
| BBVMFS015 | 15           | 14.8         | 68     | 29.5   | 54.2   | 95     | 0.21        |
| BBVMFS020 | 20           | 19           | 74     | 35     | 57.6   | 95     | 0.28        |
| BBVMFS025 | 25           | 24           | 86.5   | 42.7   | 60.6   | 125    | 0.46        |
| BBVMFS032 | 32           | 30.2         | 102    | 53     | 75.8   | 140    | 0.73        |
| BBVMFS040 | 40           | 37           | 111    | 63     | 81.3   | 140    | 0.95        |
| BBVMFS050 | 50           | 47           | 131    | 79     | 88.5   | 165    | 1.55        |

| MATERIALS |                 |
|-----------|-----------------|
| Body      | NP Brass        |
| Bonnet    | NP Brass        |
| Seal      | PTFE            |
| Ball      | CP Brass        |
| O Ring    | Viton           |
| Stem      | Brass           |
| Handle    | Stainless Steel |
| Nut       | NP Brass        |

| SPECIFICATIONS          |
|-------------------------|
| Max Working Temperature |
| 120°C                   |
| Cold Working Pressure   |
| 2500 kPa                |

| STANDARD                  |
|---------------------------|
| Thread                    |
| BSP to ISO 228-1 (Female) |
| BSP to ISO 7-1 (Male)     |