


# DR BRASS BALL VALVE SS LEVER F/F

## DR BALL VALVES

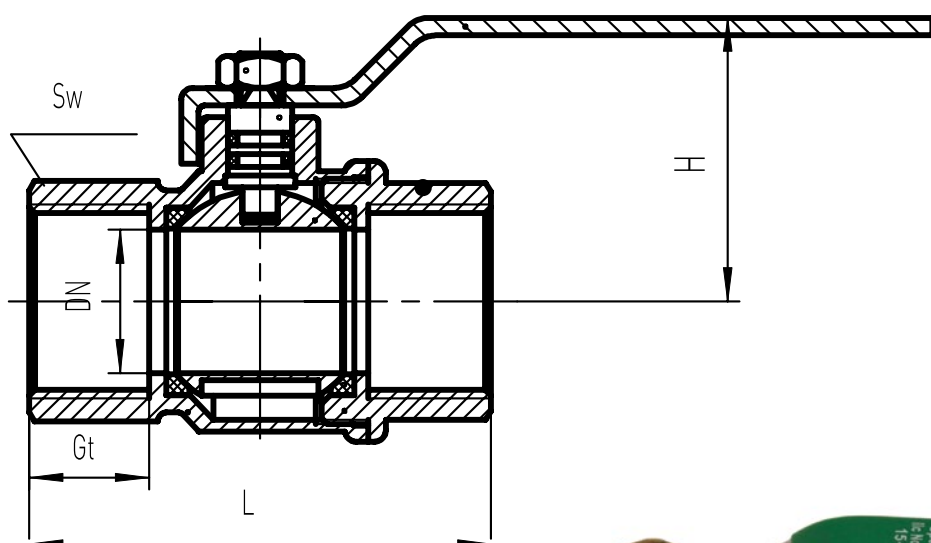

GVF CODE	DN SIZE (mm)	DN BORE (mm)	L (mm)	H (mm)	SW (mm)	Gt (mm)	WEIGHT (kg)
DBBVS008	8	8	49	37	21	13	0.15
DBBVS010	10	9.7	49	37	21	13	0.15
DBBVS015	15	14.5	59.5	39	25	16.5	0.25
DBBVS020	20	19	66.5	43	31	18.5	0.35
DBBVS025	25	24.5	76	48.5	37	19.5	0.52
DBBVS032	32	32	92.8	63	47	23	0.85
DBBVS040	40	40	100.5	77	54	23	1.28
DBBVS050	50	49	122.5	88	67	28	1.95
DBBVS065	65	64	151	112	85	43	3.5
DBBVS080	80	75	174	120	96	40	5.1

MATERIALS	
Body	DZR Brass
Bonnet	DZR Brass
Seal	PTFE
Ball	CP DZR Brass
O Ring	Viton
Stem	DZR Brass
Handle	Stainless Steel
Nut	Brass

SPECIFICATIONS
Max Working Temperature
150°C
Cold Working Pressure
2500 kPa

STANDARD
Thread
BSP to ISO 7-1

