

GAS BRASS BALL VALVE SS LEVER F/F (DL)

GAS APPROVED VALVES

VALVES

 GALVANISED
MALLEABLE

 STAINLESS
STEEL FITTINGS

 BLACK & GAL
STEEL FITTINGS


 HIGH PRESSURE
FITTINGS

CAMLOCKS

ROLL GROOVE

BUTTWELD

FLANGES

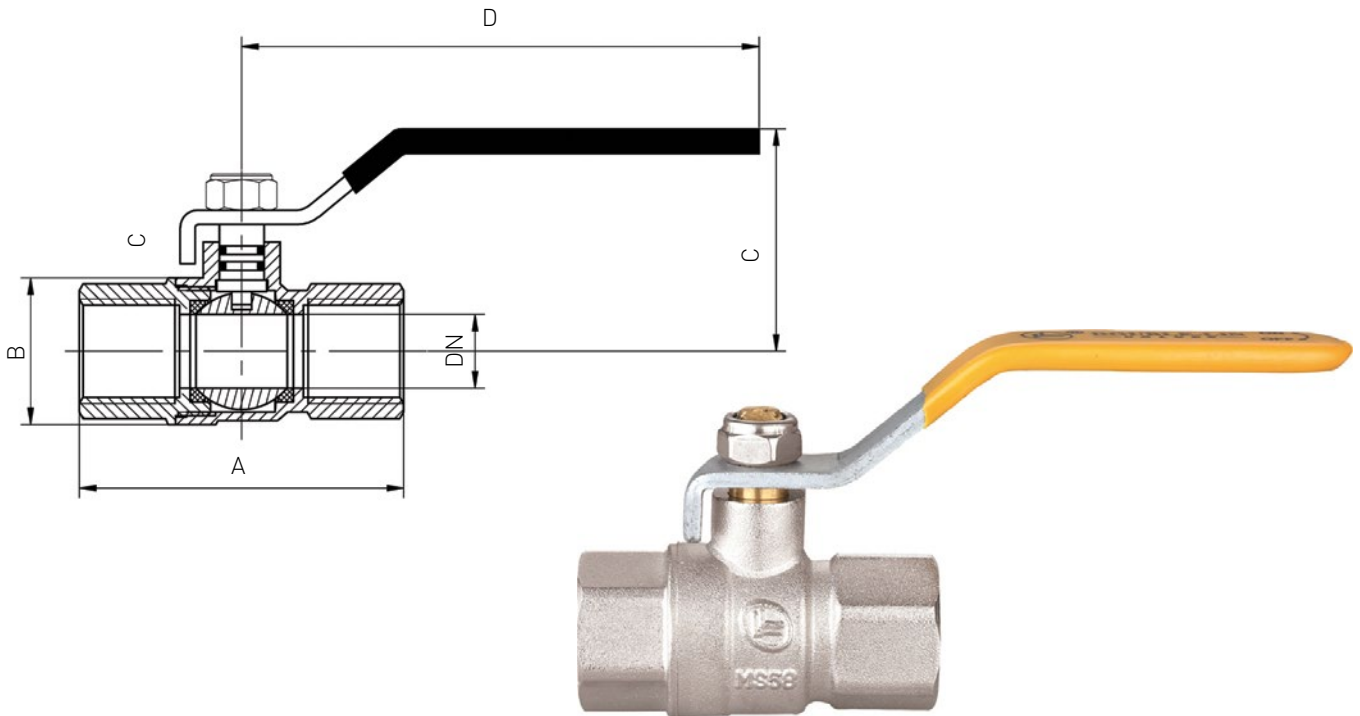

GVF CODE	DN SIZE (mm)	DN BORE (mm)	A (mm)	B (mm)	C (mm)	D (mm)	WEIGHT (kg)
GBBV008	8	9	47	23	39.2	87	0.13
GBBV010	10	10	47.8	23	39.8	87	0.12
GBBV015	15	14.8	61.4	29.5	54.2	95	0.2
GBBV020	20	19	69	35	57.6	95	0.28
GBBV025	25	24	79	42.7	60.6	126	0.46
GBBV032	32	30.2	95	53	75.8	140	0.72
GBBV040	40	37	101	63	81.3	140	0.93
GBBV050	50	47	119	79	88.5	165	1.48
GBBV065	65	62	143	102.5	121.5	224	2.98
GBBV080	80	74	165	120.5	129.5	224	4.29
GBBV100	100	90	190	144.5	141	283.5	6.46

MATERIALS	
Body	NP Brass
Bonnet	NP Brass
Seal	PTFE
Ball	CP Brass
O Ring	NBR
Stem	Brass
Handle	Stainless Steel
Nut	Stainless Steel
Also available with Lockable Lever	

SPECIFICATIONS
Max Working Temperature
80°C
Cold Working Pressure
2500 kPa

STANDARD
Thread
BSP to ISO 7-1

