


ELBOW 45° MF & FF

GALVANISED MALLEABLE FITTINGS

VALVES
 GALVANISED MALLEABLE
 STAINLESS STEEL FITTINGS
 BLACK & GAL STEEL FITTINGS
 HIGH PRESSURE FITTINGS
 CAMLOCKS
 ROLL GROOVE
 BUTTWELD
 FLANGES

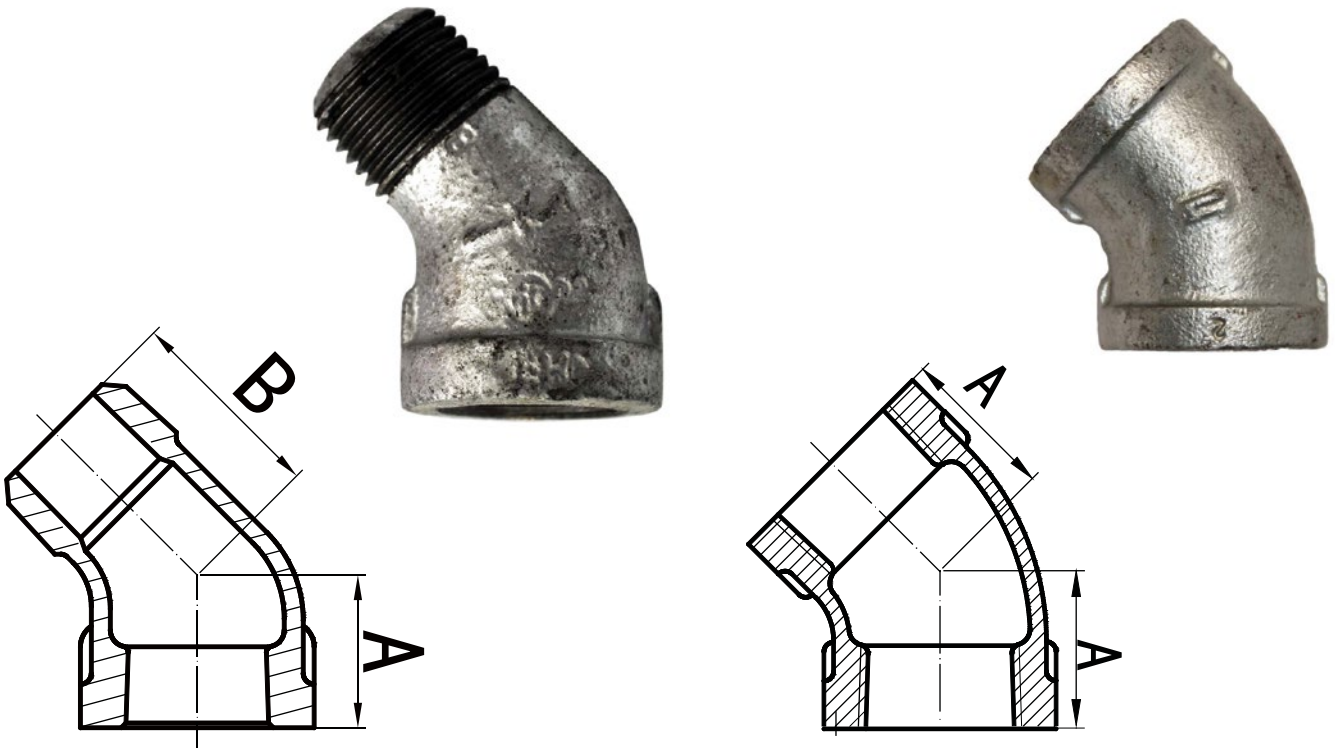

GVF CODE M&F 45°	DN SIZE (mm)	A (mm)	B (mm)	WEIGHT (kg)
GMEMF45015	15	22	28	0.08
GMEMF45020	20	25	32	0.12
GMEMF45025	25	28	37	0.18
GMEMF45032	32	33	43	0.29
GMEMF45040	40	36	46	0.38
GMEMF45050	50	43	55	0.6
GMEMF45065	65	49.5	65	0.92
GMEMF45080	80	55	76	1.2
GMEMF45100	100	66	94	2.15

GVF CODE F&F 45°	DN SIZE (mm)	A (mm)	WEIGHT (kg)
GMEFF45015	15	22	0.09
GMEFF45020	20	25	0.13
GMEFF45025	25	28	0.2
GMEFF45032	32	33	0.31
GMEFF45040	40	50	0.4
GMEFF45050	50	58	0.63
GMEFF45065	65	69	0.95
GMEFF45080	80	78	1.23
GMEFF45100	100	96	2.18

MATERIALS
Galvanised Malleable
Ductile Iron BS EN 1562

SPECIFICATIONS
Thread
BSP to ISO 7-1
Cold Working Pressure
1000 kPa

STANDARD
Dimensional
BS EN 10242