
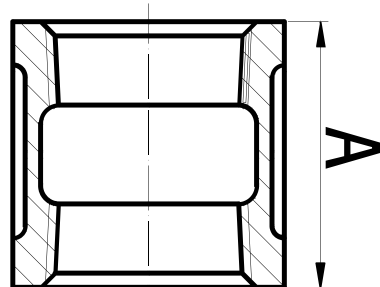


HEX NIPPLE & SOCKET

GALVANISED MALLEABLE FITTINGS



GVF CODE HEX NIPPLE	DN SIZE (mm)	A (mm)	WEIGHT (kg)
GMHN008	8	36	0.03
GMHN010	10	38	0.03
GMHN015	15	44	0.06
GMHN020	20	47	0.09
GMHN025	25	53	0.13
GMHN032	32	57	0.18
GMHN040	40	59	0.23
GMHN050	50	89	0.35
GMHN065	65	75	0.56
GMHN080	80	83	0.81
GMHN100	100	95	1.28
GMHN150	150	110	3.05

GVF CODE HEX SOCKET	DN SIZE (mm)	A (mm)	WEIGHT (kg)
GMSK008	8	27	0.04
GMSK010	10	30	0.05
GMSK015	15	36	0.08
GMSK020	20	39	0.12
GMSK025	25	45	0.17
GMSK032	32	50	0.26
GMSK040	40	55	0.32
GMSK050	50	65	0.53
GMSK065	65	74	0.79
GMSK080	80	80	0.98
GMSK100	100	94	1.65
GMSK150	150	105	3.86

MATERIALS

Galvanised Malleable
Ductile Iron BS EN 1562

SPECIFICATIONS

Thread
BSP to ISO 7-1
Cold Working Pressure
1000 kPa

STANDARD

Dimensional
BS EN 10242