

OUTLETS

HIGH PRESSURE - CLASS 3000LB

GVF CODE THREDOLET	DN SIZE (mm)	SUIT PIPE (mm)	A (mm)	C (mm)	F (mm)	WEIGHT (kg)
HPTO1525	15	25-65	25.4	21.3	31.4	0.14
HPTO1580	15	80-900	25.4	21.3	31.4	0.14
HPTO2025	20	25-65	26.9	26.7	37.1	0.16
HPTO2080	20	80-900	26.9	26.7	37.1	0.16
HPTO2525	25	25-65	33.3	33.4	45.5	0.27
HPTO2580	25	80-900	33.3	33.4	45.5	0.27
HPTO3225	32	25-65	33.3	42.2	57	0.41
HPTO3280	32	80-900	33.3	42.2	57	0.41
HPTO4025	40	25-65	35	48.3	64	0.45
HPTO4080	40	80-900	35	48.3	64	0.45
HPTO5025	50	25-65	38.1	60.3	76	0.79
HPTO5080	50	80-900	38.1	60.3	76	0.79




GVF CODE SOCKOLET	DN SIZE (mm)	SUIT PIPE (mm)	C (mm)	D (mm)	F (mm)	J (mm)	E (mm)	WEIGHT (kg)
HPSO1525	15	25-65	21.3	21.8	31.4	9.5	16	0.14
HPSO1580	15	80-900	21.3	21.8	31.4	9.5	16	0.14
HPSO2025	20	25-65	26.7	27.2	37.1	12.5	16	0.16
HPSO2080	20	80-900	26.7	27.2	37.1	12.5	16	0.16
HPSO2525	25	25-65	33.4	33.9	45.5	12.5	23	0.27
HPSO2580	25	80-900	33.4	33.9	45.5	12.5	23	0.27
HPSO4025	40	25-65	48.3	48.8	64	12.5	24	0.45
HPSO4080	40	80-900	48.3	48.8	64	12.5	24	0.45
HPSO5025	50	25-65	60.3	61.2	76	16	24	0.73
HPSO5080	50	80-900	60.3	61.2	76	16	24	0.73

GVF CODE WELDOLET	DN SIZE (mm)	SUIT PIPE (mm)	A (mm)	C (mm)	F (mm)	T (mm)	WEIGHT (kg)
HPWO1525X	15	25-65	19.1	21.3	21.3	2.77	0.09
HPWO1580X	15	80-900	19.1	21.3	21.3	2.77	0.09
HPWO2025X	20	25-65	22.4	26.7	26.7	2.87	0.11
HPWO2080X	20	80-900	22.4	26.7	26.7	2.87	0.11
HPWO2525X	25	25-65	26.9	33.4	33.4	3.38	0.23
HPWO2580X	25	80-900	26.9	33.4	33.4	3.38	0.23
HPWO4025X	40	25-65	33.3	48.3	48.3	3.68	0.45
HPWO4080X	40	80-900	33.3	48.3	48.3	3.68	0.45
HPWO5025X	50	25-65	38.1	60.3	60.3	3.91	0.79
HPWO5080X	50	80-900	38.1	60.3	60.3	3.91	0.79

MATERIALS
Forged Carbon Steel

SPECIFICATIONS
Thread
BSPT & NPT
Ends
Socket & Butt weld

STANDARD
Material
ASTM A105
Dimensional
MSS SP-97

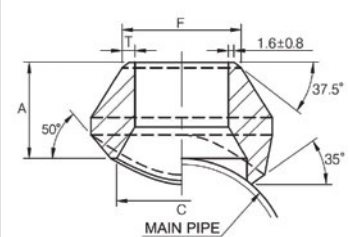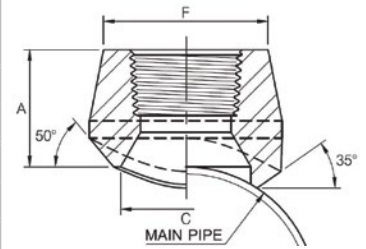

VALVES
GALVANISED
MALLEABLE
STAINLESS
STEEL FITTINGS
BLACK & GAL
HIGH PRESSURE
FITTINGS
CAMLOCKS
ROLL GROOVE
BUTTWELD
FLANGES