




# RUBBER BELLOWS

## BELLOWS

PLEASE CHECK WITH YOUR LOCAL GVF  
BRANCH FOR ADDITIONAL PRODUCTS.  
DIN AVAILABLE

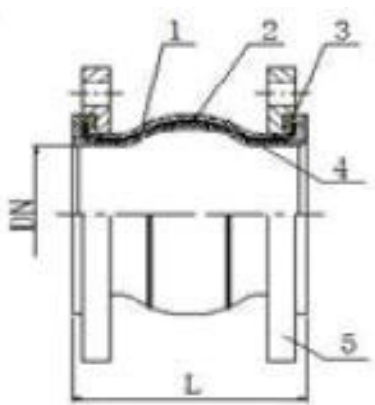

| GVF CODE | DN SIZE (mm) | Length (mm) | ELONGATION (mm) | COMPRESSION (mm) | LATERAL DISPLACEMENT (mm) | ANGLE OF DEFLECTION (mm) | WEIGHT (kg) |
|----------|--------------|-------------|-----------------|------------------|---------------------------|--------------------------|-------------|
| RBE025   | 25           | 95          | 6               | 9                | 9                         | 15°                      | 2           |
| RBE032   | 32           | 95          | 6               | 10               | 9                         | 15°                      | 2.3         |
| RBE040   | 40           | 105         | 6               | 10               | 9                         | 15°                      | 2.75        |
| RBE050   | 50           | 115         | 7               | 10               | 10                        | 15°                      | 3           |
| RBE065   | 65           | 135         | 8               | 13               | 12                        | 15°                      | 4.1         |
| RBE080   | 80           | 150         | 8               | 15               | 12                        | 15°                      | 5.2         |
| RBE100   | 100          | 165         | 12              | 19               | 15                        | 15°                      | 6           |
| RBE125   | 125          | 180         | 12              | 19               | 15                        | 15°                      | 10.3        |
| RBE150   | 150          | 190         | 12              | 20               | 15                        | 10°                      | 11.6        |
| RBE200   | 200          | 230         | 12              | 20               | 22                        | 10°                      | 16          |
| RBE250   | 250          | 245         | 16              | 28               | 22                        | 10°                      | 24          |
| RBE300   | 300          | 265         | 16              | 28               | 25                        | 10°                      | 27          |
| RBE350   | 350          | 265         | 16              | 28               | 25                        | 10°                      | 41          |
| RBE400   | 400          | 265         | 16              | 28               | 25                        | 10°                      | 50          |
| RBE450   | 450          | 265         | 16              | 28               | 25                        | 10°                      | 80          |
| RBE500   | 500          | 265         | 16              | 28               | 25                        | 10°                      | 75          |
| RBE600   | 600          | 265         | 16              | 28               | 25                        | 10°                      | 120         |

| MATERIALS    |                        |
|--------------|------------------------|
| Outer Rubber | EPDM                   |
| Cord Fabric  | Nylon                  |
| Steel Wire   | Steel                  |
| Inner Rubber | EPDM                   |
| Flange       | HDG Steel/ Zinc Plated |

| SPECIFICATIONS          |                |
|-------------------------|----------------|
| Max Working Temperature | -15°C to 115°C |
| Cold Working Pressure   | 1600 kPa       |

| STANDARD |           |
|----------|-----------|
| Flanges  | AS2129/TE |