


STD WT EQUAL TEE & CAP BUTTWELD

VALVES
 GALVANISED MALLEABLE
 STAINLESS STEEL FITTINGS
 BLACK & GAL STEEL FITTINGS
 HIGH PRESSURE FITTINGS
 CAMLOCKS
 ROLL GROOVE
 BUTTWELD
 FLANGES

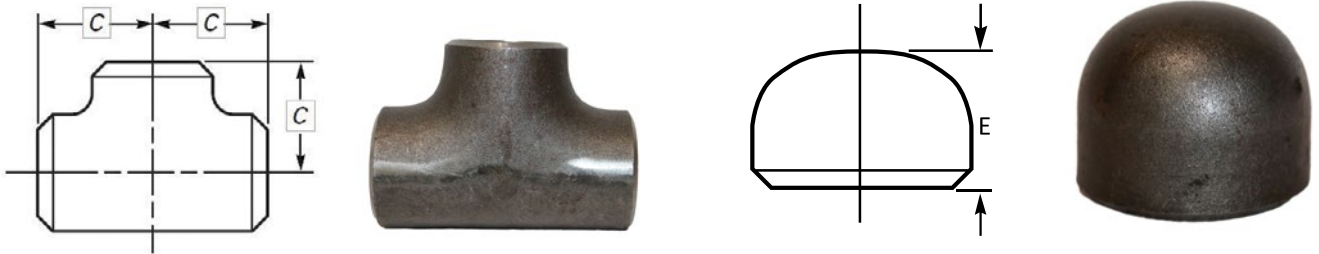

GVF CODE TEE	DN SIZE (mm)	OD SIZE (mm)	WALL (mm)	C (mm)	WEIGHT (kg)
TS015	15	21.3	2.77	25	0.09
TS020	20	26.7	2.87	29	0.12
TS025	25	33.4	3.38	38	0.25
TS032	32	42.2	3.56	48	0.46
TS040	40	48.3	3.68	57	0.72
TS050	50	60.3	3.91	64	0.99
TS065	65	73	5.16	76	1.9
TS080	80	88.9	5.49	86	2.85
TS100	100	114.3	6.02	105	4.83
TS125	125	141.3	6.55	124	8
TS150	150	168.3	7.11	143	10.2
TS200	200	219.1	8.18	178	22.9
TS250	250	273	9.27	216	36.6
TS300	300	323.8	9.53	254	47
TS350	350	355.6	9.53	279	60
TS400	400	406.4	9.53	305	75
TS450	450	457	9.53	343	96
TS500	500	508	9.53	381	104
TS600	600	559	9.53	432	139

GVF CODE CAP	DN SIZE (mm)	OD SIZE (mm)	WALL (mm)	E (mm)	WEIGHT (kg)
CS015	15	21.3	2.77	25	0.04
CS020	20	26.7	2.87	25	0.05
CS025	25	33.4	3.38	38	0.11
CS032	32	42.2	3.56	38	0.14
CS040	40	48.3	3.68	38	0.17
CS050	50	60.3	3.91	38	0.23
CS065	65	73	5.16	38	0.39
CS080	80	88.9	5.49	51	0.66
CS100	100	114.3	6.02	64	1.17
CS125	125	141.3	6.55	76	1.91
CS150	150	168.3	7.11	89	2.9
CS200	200	219.1	8.18	102	5.19
CS250	250	273	9.27	127	9.15
CS300	300	323.8	9.53	152	13.3
CS350	350	355.6	9.53	165	15.9
CS400	400	406.4	9.53	178	20
CS450	450	457	9.53	203	25.6
CS500	500	508	9.53	229	32.2
CS600	600	559	9.53	267	45

MATERIALS
ASTM A234 WPB
Carbon Steel Seamless

SPECIFICATIONS
Pressure Rating
As per ASME B31.3 (refer pg196)

STANDARD
Dimensional
ASME B16.9