


# LUGGED BUTTERFLY VALVES - EPDM

## BUTTERFLY VALVES - TABLE E

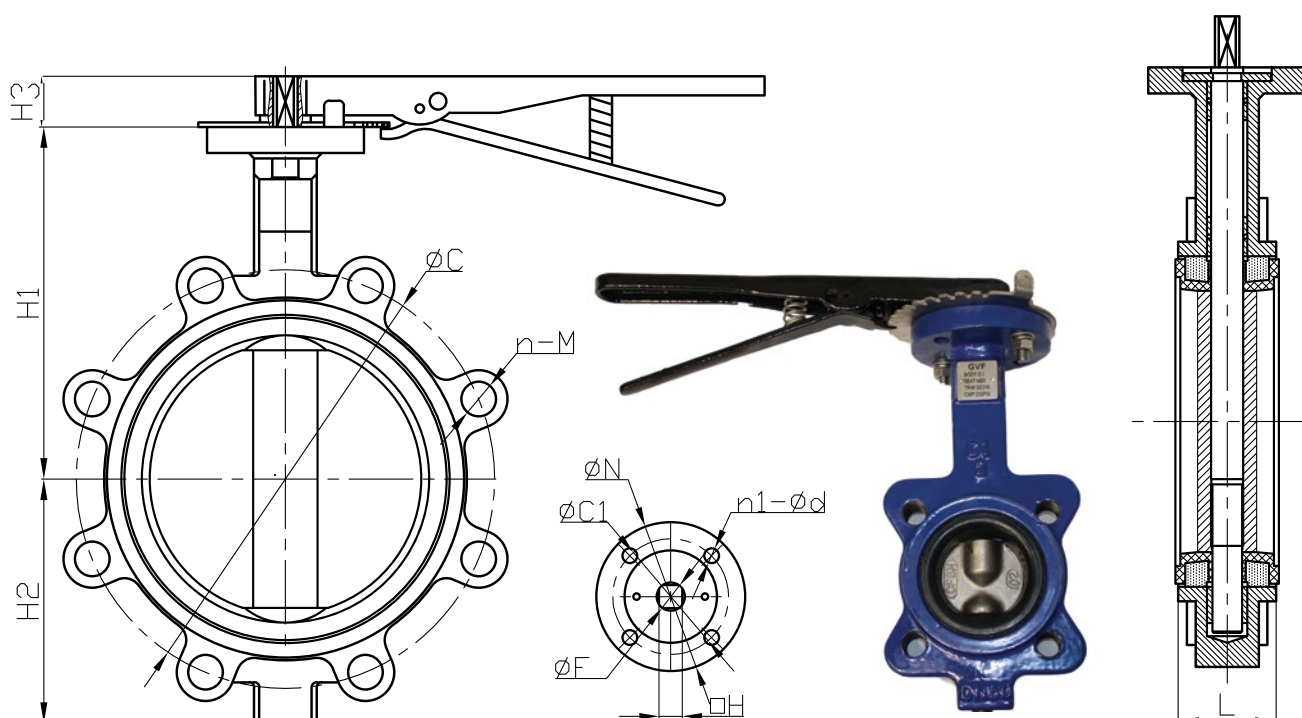

GVF CODE	DN SIZE (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	ØN (mm)	ØC1 (mm)	n1-Ød (mm)	ØC (mm)	n-M (mm)	ØF (mm)	H (mm)	WEIGHT (kg)
BFVLE050	50	161	80	29	43	90	70	4-10	114	4-M16	14.1	11	4.35
BFVLE065	65	175	89	29	46	90	70	4-10	127	4-M16	14.1	11	5.19
BFVLE080	80	181	95	29	46	90	70	4-10	146	4-M16	14.1	11	5.80
BFVLE100	100	200	114	29	52	90	70	4-10	178	8-M16	18.1	14	7.75
BFVLE125	125	213	127	29	56	90	70	4-10	210	8-M16	22.2	17	11.07
BFVLE150	150	226	139	29	56	90	70	4-10	235	8-M20	22.2	17	11.38
BFVLE200	200	260	175	35.5	60	125	102	4-12	292	8-M20	22.2	17	19.49
BFVLE250	250	292	203	35.5	68	125	102	4-12	356	12-M20	28.2	22	28.42
BFVLE300	300	337	242	35.5	78	125	102	4-12	406	12-M24	28.2	22	42.53

MATERIALS	
Body	Ductile Iron
Disc	CF8M
Stem	SS416
Seat	EPDM

SPECIFICATIONS
Max Working Temperature
100°C
Cold Working Pressure
1600 kPa
<b>Not suitable for end-of-line service</b>

STANDARD
General
ISO 5752
Face to Face
ISO 5752
Pressure Test
API 598
Mounting Pad
ISO 5211
Flange Drilling
AS2129 Table E