




RUBBER BELLOWS

BELLOWS

PLEASE CHECK WITH YOUR LOCAL GVF
BRANCH FOR ADDITIONAL PRODUCTS.
DIN AVAILABLE

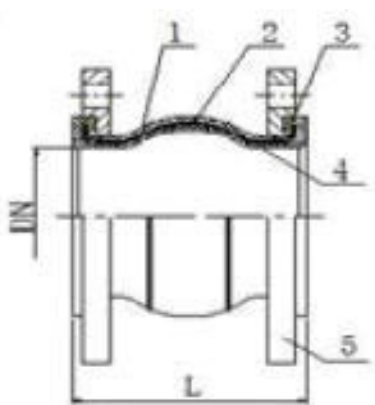

GVF CODE	DN SIZE (mm)	Length (mm)	ELONGATION (mm)	COMPRESSION (mm)	LATERAL DISPLACEMENT (mm)	ANGLE OF DEFLECTION (mm)	WEIGHT (kg)
RBE025	25	95	6	9	9	15°	2
RBE032	32	95	6	10	9	15°	2.3
RBE040	40	95	6	10	9	15°	2.75
RBE050	50	105	7	10	10	15°	3
RBE065	65	115	8	13	12	15°	4.1
RBE080	80	135	8	15	12	15°	5.2
RBE100	100	135	12	19	15	15°	6
RBE125	125	165	12	19	15	15°	10.3
RBE150	150	185	12	20	15	10°	11.6
RBE200	200	210	12	20	22	10°	16
RBE250	250	240	16	28	22	10°	24
RBE300	300	260	16	28	25	10°	27
RBE350	350	265	16	28	25	10°	41
RBE400	400	265	16	28	25	10°	50
RBE450	450	265	16	28	25	10°	80
RBE500	500	265	16	28	25	10°	75
RBE600	600	265	16	28	25	10°	120

MATERIALS	
Outer Rubber	EPDM
Cord Fabric	Nylon
Steel Wire	Steel
Inner Rubber	EPDM
Flange	HDG Steel/ Zinc Plated

SPECIFICATIONS	
Max Working Temperature	-15°C to 115°C
Cold Working Pressure	1600 kPa

STANDARD	
Flanges	AS2129/TE