


TABLE "E" BLIND PLATE FLANGES

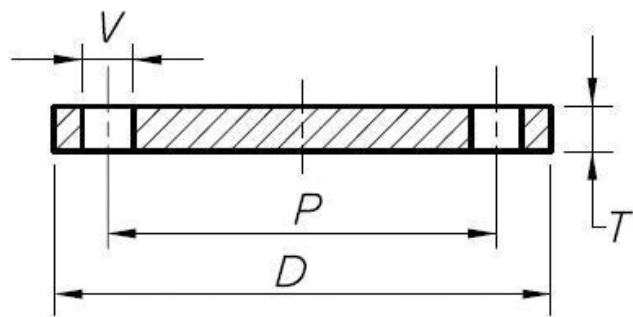

Nominal Pipe Size (mm)	GVF Code	OD of Flange D (mm)	Bolt Circle Diameter P (mm)	Bolt Hole Diameter V (mm)	Number of Bolt Holes	Thickness of Flange T (mm)	Weight Approx. (kg)
15	ASBLE015	95	67	14	4	12	0.63
20	ASBLE020	100	73	14	4	12	0.7
25	ASBLE025	115	83	14	4	12	0.77
32	ASBLE032	120	87	14	4	12	1.04
40	ASBLE040	135	98	14	4	12	1.33
50	ASBLE050	150	114	18	4	12	1.62
65	ASBLE065	165	127	18	4	12	1.98
80	ASBLE080	185	146	18	4	12	2.51
100	ASBLE100	215	178	18	8	13	3.59
125	ASBLE125	255	210	18	8	14	5.52
150	ASBLE150	280	235	22	8	17	8.01
200	ASBLE200	335	292	22	8	19	12.92
250	ASBLE250	405	356	22	12	22	21.78
300	ASBLE300	455	406	26	12	25	31.07
350	ASBLE350	525	470	26	12	29	48.4
400	ASBLE400	580	521	26	12	32	65.47
450	ASBLE450	640	584	26	16	35	86.9
500	ASBLE500	705	641	26	16	38	114.94
600	ASBLE600	825	756	33	16	48	194.89

MATERIALS

Q235B / Rst37.2

Plate Steel

SPECIFICATIONS

Pressure Rating

1400 kPa

STANDARD

Dimensional

AS2129